




Product Service

CERTIFICATE

No. Z2 073899 0083 Rev. 03

Holder of Certificate: **ZNSHINE PV-TECH Co., Ltd.**
No.1, South Zhenxing Road
Industrial Zone, Zhixi Town, Jintan District
213251 Changzhou City, Jiangsu Province
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

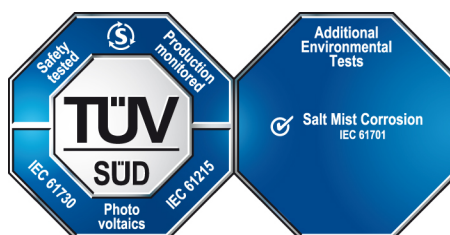

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061908311-03

Valid until: 2027-04-03

Date, 2022-04-04

(David Bo)

CERTIFICATE

No. Z2 073899 0083 Rev. 03

Model(s):

ZXM6-NHLDD156-xxx/M, xxx= 455 to 500 in steps of 5
ZXM6-NPLDD156-xxx/M, xxx= 455 to 500 in steps of 5
ZXM6-NOLDD156-xxx/M, xxx= 455 to 500 in steps of 5
ZXM6-NHLDD144-xxx/M, xxx= 420 to 460 in steps of 5
ZXM6-NPLDD144-xxx/M, xxx= 420 to 460 in steps of 5
ZXM6-NOLDD144-xxx/M, xxx= 420 to 460 in steps of 5
ZXM6-NHLDD132-xxx/M, xxx= 385 to 420 in steps of 5
ZXM6-NPLDD132-xxx/M, xxx= 385 to 420 in steps of 5
ZXM6-NOLDD132-xxx/M, xxx= 385 to 420 in steps of 5
ZXM6-NHLDD120-xxx/M, xxx= 350 to 385 in steps of 5
ZXM6-NPLDD120-xxx/M, xxx= 350 to 385 in steps of 5
ZXM6-NOLDD120-xxx/M, xxx= 350 to 385 in steps of 5
ZXM6-NHLDD144-xxx/M, xxx= 385 to 410 in steps of 5
ZXM6-NPLDD144-xxx/M, xxx= 385 to 410 in steps of 5
ZXM6-NOLDD144-xxx/M, xxx= 385 to 410 in steps of 5
ZXM6-NHLDD132-xxx/M, xxx= 360 to 375 in steps of 5
ZXM6-NPLDD132-xxx/M, xxx= 360 to 375 in steps of 5
ZXM6-NOLDD132-xxx/M, xxx= 360 to 375 in steps of 5
ZXM6-NHLDD120-xxx/M, xxx= 325 to 340 in steps of 5
ZXM6-NPLDD120-xxx/M, xxx= 325 to 340 in steps of 5
ZXM6-NOLDD120-xxx/M, xxx= 325 to 340 in steps of 5
ZXM6-LDD72-xxx/M, xxx= 380 to 400 in steps of 5
ZXM6-LDD66-xxx/M, xxx= 350 to 365 in steps of 5
ZXM6-LDD60-xxx/M, xxx= 320 to 330 in steps of 5
ZXM6-HLDD144-xxx/M, xxx= 380 to 405 in steps of 5
ZXM6-PLDD144-xxx/M, xxx= 380 to 405 in steps of 5
ZXM6-HLDD132-xxx/M, xxx= 350 to 370 in steps of 5
ZXM6-PLDD132-xxx/M, xxx= 350 to 370 in steps of 5
ZXM6-HLDD120-xxx/M, xxx= 320 to 335 in steps of 5
ZXM6-PLDD120-xxx/M, xxx= 320 to 335 in steps of 5
ZXM6-NHLD144-xxx/M, xxx= 420 to 460 in steps of 5
ZXM6-NPLD144-xxx/M, xxx= 420 to 460 in steps of 5
ZXM6-NOLD144-xxx/M, xxx= 420 to 460 in steps of 5
ZXM6-NHLD132-xxx/M, xxx= 385 to 420 in steps of 5
ZXM6-NPLD132-xxx/M, xxx= 385 to 420 in steps of 5
ZXM6-NOLD132-xxx/M, xxx= 385 to 420 in steps of 5
ZXM6-NHLD120-xxx/M, xxx= 350 to 385 in steps of 5
ZXM6-NPLD120-xxx/M, xxx= 350 to 385 in steps of 5
ZXM6-NOLD120-xxx/M, xxx= 350 to 385 in steps of 5
ZXM6-NHLD144-xxx/M, xxx= 380 to 410 in steps of 5
ZXM6-NPLD144-xxx/M, xxx= 380 to 410 in steps of 5
ZXM6-NOLD144-xxx/M, xxx= 380 to 410 in steps of 5
ZXM6-NHLD132-xxx/M, xxx= 350 to 375 in steps of 5
ZXM6-NPLD132-xxx/M, xxx= 350 to 375 in steps of 5
ZXM6-NOLD132-xxx/M, xxx= 350 to 375 in steps of 5
ZXM6-NHLD120-xxx/M, xxx= 320 to 340 in steps of 5
ZXM6-NPLD120-xxx/M, xxx= 320 to 340 in steps of 5
ZXM6-NOLD120-xxx/M, xxx= 320 to 340 in steps of 5
ZXM6-HLD144-xxx/M, xxx= 380 to 405 in steps of 5
ZXM6-PLD144-xxx/M, xxx= 380 to 405 in steps of 5
ZXM6-HLD132-xxx/M, xxx= 350 to 370 in steps of 5
ZXM6-PLD132-xxx/M, xxx= 350 to 370 in steps of 5
ZXM6-HLD120-xxx/M, xxx= 320 to 335 in steps of 5
ZXM6-PLD120-xxx/M, xxx= 320 to 335 in steps of 5
ZXM6-LD72-xxx/M, xxx= 380 to 400 in steps of 5
ZXM6-LD66-xxx/M, xxx= 350 to 365 in steps of 5
ZXM6-LD60-xxx/M, xxx= 320 to 330 in steps of 5
ZXM7-SOLDD144-xxx/M, xxx= 520 to 555 in steps of 5
ZXM7-SPLDD144-xxx/M, xxx= 520 to 555 in steps of 5
ZXM7-SHLDD144-xxx/M, xxx= 520 to 555 in steps of 5
ZXM7-SOLDD132-xxx/M, xxx= 480 to 510 in steps of 5
ZXM7-SPLDD132-xxx/M, xxx= 480 to 510 in steps of 5
ZXM7-SHLDD132-xxx/M, xxx= 480 to 510 in steps of 5
ZXM7-SOLDD120-xxx/M, xxx= 435 to 465 in steps of 5
ZXM7-SPLDD120-xxx/M, xxx= 435 to 465 in steps of 5
ZXM7-SHLDD120-xxx/M, xxx= 435 to 465 in steps of 5
ZXM7-SHLDD108-xxx/M, xxx= 390 to 415 in steps of 5
ZXM7-SPLDD108-xxx/M, xxx= 390 to 415 in steps of 5
ZXM7-SOLD144-xxx/M, xxx= 520 to 555 in steps of 5
ZXM7-SPLD144-xxx/M, xxx= 520 to 555 in steps of 5

CERTIFICATE

No. Z2 073899 0083 Rev. 03

ZXM7-SHLD144-xxx/M, xxx= 520 to 555 in steps of 5
 ZXM7-SOLD132-xxx/M, xxx= 480 to 510 in steps of 5
 ZXM7-SPLD132-xxx/M, xxx= 480 to 510 in steps of 5
 ZXM7-SHLD132-xxx/M, xxx= 480 to 510 in steps of 5
 ZXM7-SOLD120-xxx/M, xxx= 435 to 465 in steps of 5
 ZXM7-SPLD120-xxx/M, xxx= 435 to 465 in steps of 5
 ZXM7-SHLD120-xxx/M, xxx= 435 to 465 in steps of 5
 ZXM7-SHLD108-xxx/M, xxx= 390 to 415 in steps of 5
 ZXM7-SPLD108-xxx/M, xxx= 390 to 415 in steps of 5
 ZXM8-SOLDD150-xxx/M, xxx= 480 to 515 in steps of 5
 ZXM8-SPLDD150-xxx/M, xxx= 480 to 515 in steps of 5
 ZXM8-SHLDD150-xxx/M, xxx= 480 to 515 in steps of 5
 ZXM8-SOLDD140-xxx/M, xxx= 450 to 480 in steps of 5
 ZXM8-SPLDD140-xxx/M, xxx= 450 to 480 in steps of 5
 ZXM8-SHLDD140-xxx/M, xxx= 450 to 480 in steps of 5
 ZXM8-SOLDD130-xxx/M, xxx= 420 to 445 in steps of 5
 ZXM8-SPLDD130-xxx/M, xxx= 420 to 445 in steps of 5
 ZXM8-SHLDD130-xxx/M, xxx= 420 to 445 in steps of 5
 ZXM8-SOLDD120-xxx/M, xxx= 385 to 410 in steps of 5
 ZXM8-SPLDD120-xxx/M, xxx= 385 to 410 in steps of 5
 ZXM8-SHLDD120-xxx/M, xxx= 385 to 410 in steps of 5
 ZXM8-SOLDD90-xxx/M, xxx= 290 to 310 in steps of 5
 ZXM8-SPLDD90-xxx/M, xxx= 290 to 310 in steps of 5
 ZXM8-SHLDD90-xxx/M, xxx= 290 to 310 in steps of 5
 ZXM8-SOLD150-xxx/M, xxx= 480 to 515 in steps of 5
 ZXM8-SPLD150-xxx/M, xxx= 480 to 515 in steps of 5
 ZXM8-SHLD150-xxx/M, xxx= 480 to 515 in steps of 5
 ZXM8-SOLD140-xxx/M, xxx= 450 to 480 in steps of 5
 ZXM8-SPLD140-xxx/M, xxx= 450 to 480 in steps of 5
 ZXM8-SHLD140-xxx/M, xxx= 450 to 480 in steps of 5
 ZXM8-SOLD130-xxx/M, xxx= 420 to 445 in steps of 5
 ZXM8-SPLD130-xxx/M, xxx= 420 to 445 in steps of 5
 ZXM8-SHLD130-xxx/M, xxx= 420 to 445 in steps of 5
 ZXM8-SOLD120-xxx/M, xxx= 385 to 410 in steps of 5
 ZXM8-SPLD120-xxx/M, xxx= 385 to 410 in steps of 5
 ZXM8-SHLD120-xxx/M, xxx= 385 to 410 in steps of 5
 ZXM8-SOLD90-xxx/M, xxx= 290 to 310 in steps of 5
 ZXM8-SPLD90-xxx/M, xxx= 290 to 310 in steps of 5
 ZXM8-SHLD90-xxx/M, xxx= 290 to 310 in steps of 5
 ZXM8-TPLDD132-xxx/M, xxx= 630 to 670 in steps of 5
 ZXM8-THLDD132-xxx/M, xxx= 630 to 670 in steps of 5
 ZXM8-TPLDD120-xxx/M, xxx= 575 to 610 in steps of 5
 ZXM8-THLDD120-xxx/M, xxx= 575 to 610 in steps of 5
 ZXM8-TPLDD110-xxx/M, xxx= 525 to 560 in steps of 5
 ZXM8-THLDD110-xxx/M, xxx= 525 to 560 in steps of 5
 ZXM8-TPLDD100-xxx/M, xxx= 480 to 510 in steps of 5
 ZXM8-THLDD100-xxx/M, xxx= 480 to 510 in steps of 5
 ZXM8-TPLDD90-xxx/M, xxx= 430 to 455 in steps of 5
 ZXM8-THLDD90-xxx/M, xxx= 430 to 455 in steps of 5
 ZXM8-TPLDD80-xxx/M, xxx= 385 to 405 in steps of 5
 ZXM8-THLDD80-xxx/M, xxx= 385 to 405 in steps of 5
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed, with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class A according to UL790
Severity of Salt mist test:	Severity 6

Tested according to:

IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016
 IEC 61701:2011