

ZXM6-NHLD120 Series

Znshinesolar 9BB HALF-CELL Light-Weight
Double Glass Mono PERC PV Module



320W | 325W | 330W | 335W | 340W | 345W



Excellent cells efficiency

9BB technology decreases the distance between bus bars and finger grid line which is benefit to power increase.



Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and morning



Anti PID

Limited power degradation caused by PID effect is guaranteed under strict testing condition for mass production



High wind and snow resistance

■ 5400 Pa snow load ■ 2400 Pa wind load





30 years power warranty

After 30 years our solar panel keeps at least 80% of its initial power output



Easy to install

Frame design makes module compatible with all racking and installation methods

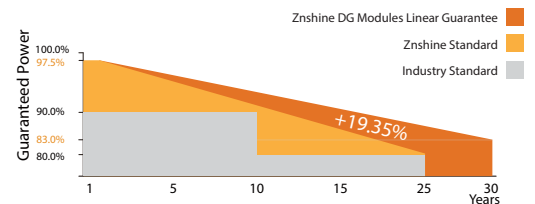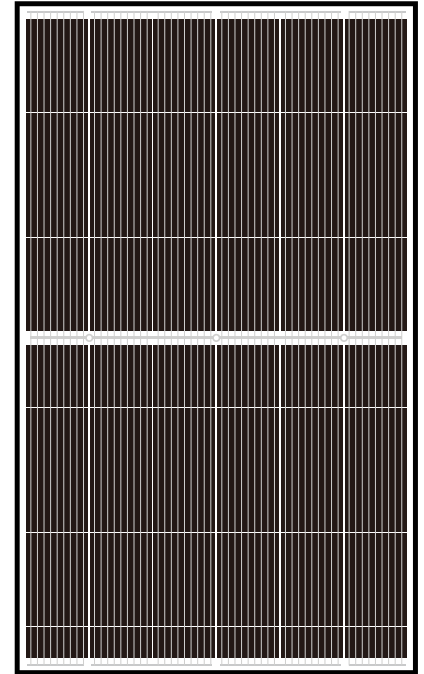

12 years product guarantee
30 years output guarantee



0.5% annual degradation
over 30 years



Founded in 1988, ZNShine solar is a world's leading high-tech PV module manufacturer. With the state-of-the-art production lines, the company boasts module capacity of 6GW. Bloomberg has listed ZNShine as a global Tier 1 PV module maker. Today Znshine has distributed its sales to more than 60 countries around the globe.

ELECTRICAL CHARACTERISTICS | STC*

| | | | | | | |
|--------------------------------|-------|-------|-------|-------|-------|-------|
| Nominal Power Watt Pmax(W)* | 320 | 325 | 330 | 335 | 340 | 345 |
| Power Output Tolerance Pmax(%) | 0~+3 | 0~+3 | 0~+3 | 0~+3 | 0~+3 | 0~+3 |
| Maximum Power Voltage Vmp(V) | 33.40 | 33.60 | 33.80 | 34.00 | 34.30 | 34.50 |
| Maximum Power Current Imp(A) | 9.59 | 9.68 | 9.77 | 9.86 | 9.92 | 10.01 |
| Open Circuit Voltage Voc(V) | 40.10 | 40.30 | 40.50 | 40.70 | 41.00 | 41.20 |
| Short Circuit Current Isc(A) | 10.16 | 10.25 | 10.34 | 10.43 | 10.52 | 10.60 |
| Module Efficiency (%) | 18.83 | 19.12 | 19.42 | 19.71 | 20.01 | 20.30 |

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5
 *Measuring tolerance: ±3%

ELECTRICAL CHARACTERISTICS | NMOT*

| | | | | | | |
|-------------------------------|--------|--------|--------|--------|--------|--------|
| Maximum Power Pmax(Wp) | 238.80 | 242.40 | 246.00 | 249.70 | 253.50 | 257.20 |
| Maximum Power Voltage Vmpp(V) | 30.90 | 31.10 | 31.30 | 31.50 | 31.70 | 31.90 |
| Maximum Power Current Impp(A) | 7.72 | 7.79 | 7.85 | 7.92 | 7.99 | 8.05 |
| Open Circuit Voltage Voc(V) | 37.40 | 37.60 | 37.80 | 37.90 | 38.20 | 38.40 |
| Short Circuit Current Isc(A) | 8.20 | 8.28 | 8.35 | 8.42 | 8.50 | 8.56 |

*NMOT(Nominal module operating temperature):Irradiance 800W/m²,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s

MECHANICAL DATA

| | |
|-------------------|--|
| Solar cells | Mono PERC |
| Cells orientation | 120 (6×20) |
| Module dimension | 1696×1002×30 mm(With Frame) |
| Weight | 22 kg |
| Glass | 2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass |
| Junction box | IP 68, 3 diodes |
| Cables | 4 mm ² , 1000 mm |
| Connectors | MC4-compatible |

TEMPERATURE RATINGS WORKING CONDITIONS


| | | | |
|---------------------------------|-----------|-------------------------|-------------------|
| NMOT | 44°C ±2°C | Maximum system voltage | 1500 V DC |
| Temperature coefficient of Pmax | -0.36%/°C | Operating temperature | -40°C~+85°C |
| Temperature coefficient of Voc | -0.29%/°C | Maximum series fuse | 20 A |
| Temperature coefficient of Isc | 0.05%/°C | Maximum load(snow/wind) | 5400 Pa / 2400 Pa |

*Do not connect Fuse in Combiner Box with two or more strings in parallel connection
 *Remark:Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.


PACKAGING CONFIGURATION

| | |
|--|-----|
| Piece/Box | 36 |
| Piece/Container _(40'HQ) | 936 |
| Piece/Container _(with additional small package) | / |


DIMENSIONS(MM)

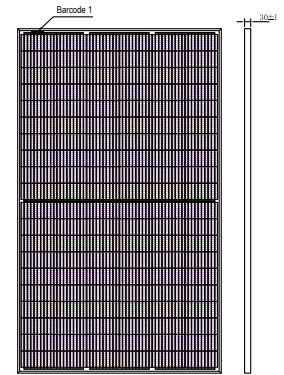


Front View

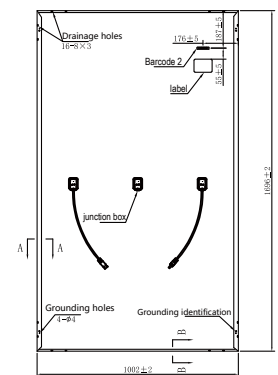

Back View



I-V CURVES OF PV MODULE(345W)

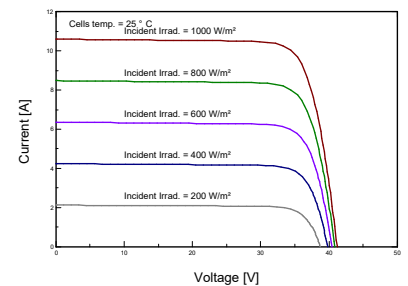

P-V CURVES OF PV MODULE(345W)

